

Hedera Apex™

Specifications



Output Spectrum

Customizable. 6 individually controllable color channels

PPF

156 umol/s per 300mm

Input Power

60W per 300mm

Efficacy

Up to 2.61 umol/J at max power.

Input voltage

120-277VAC, 347VAC

Dimming

Digital control with Hornet protocol

Light distribution

120° FWHM

Lifetime

L90 > 54,000 hours

Power factor

> 90%

Operating temperature:

0°C to +40°C

Recommended Minimum Airflow

4 m/s

Features and Certifications

IP66

IP67

5 Year Warranty


Made in Canada

Unibody

Color-Amp™



AS - Apex Standard

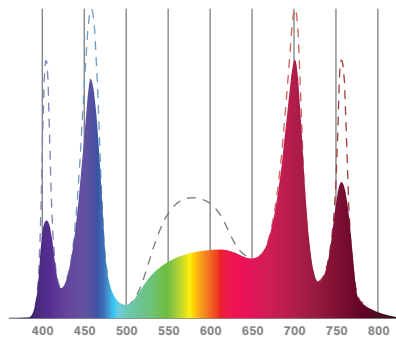

Designed and built to meet cULus standards 1598, 8750, 8800

Configurations



FAMILY	MODEL	LENGTH (mm)	BODY COLOR	POWER (per 300mm)	LED TYPE	OPTICAL	INPUT VOLTAGE
HEREDERA	A - Apex	600 900 1200 1500	CM - Clear Matte Anodized	60W	AS - Apex Standard CUST - Custom ¹	120 - 120°x120°	120VAC 230VAC 240VAC 277VAC 347VAC

1. For custom configurations contact factory

Example: HEDERA-A-1200-CM-60W-AS-120-120VAC



A Division of GVA Lighting, Inc.

Linnaeus Lighting
2771 Bristol Circle
Oakville, Ontario L6H 6X5
Canada

Phone: 289 814 2948
Email: info@linnaeuslighting.com
Web: linnaeuslighting.com