

Hedera Vertex™

Specifications



PPF

159 umol/s per 300mm

Input Power

60W per 300mm

Efficacy

Up to 2.4 umol/J

Input voltage

120-277VAC, 347VAC

Dimming

0-10V dimming option available

Light distribution

60° FWHM

Lifetime

L90 > 54,000 hours

Power factor

> 90%

Operating temperature:

0°C to +40°C

Recommended Minimum Airflow

4 m/s

Features and Certifications

IP66


IP67

5 Year Warranty


Made in Canada




Designed and built to meet cULus standards 1598, 8750, 8800

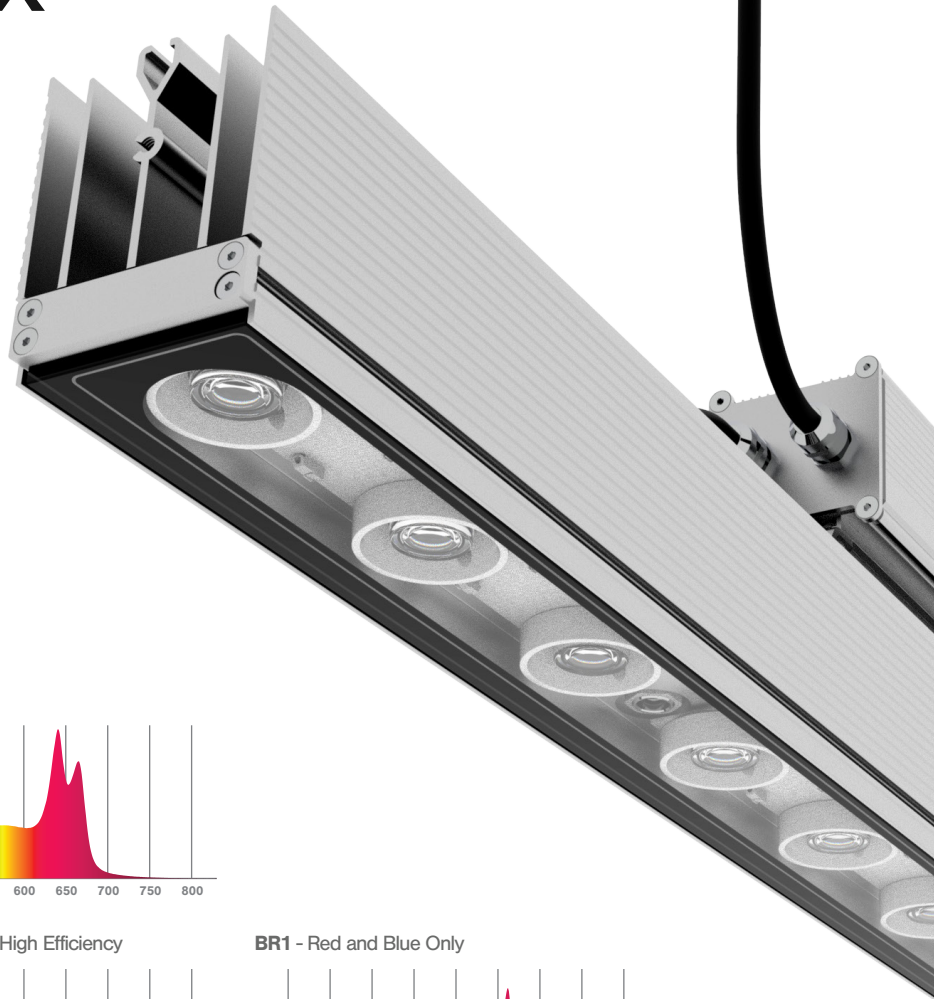


AP1 - All Purpose

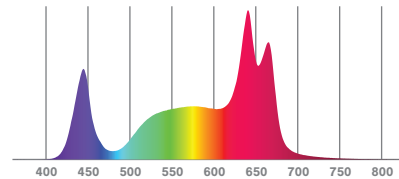

APHE1 - All Purpose High Efficiency

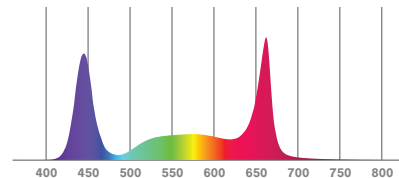

BR1 - Red and Blue Only

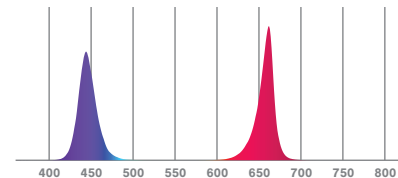

Configurations



FAMILY	MODEL	LENGTH (mm)	BODY COLOR	POWER (per 300mm)	LED TYPE	OPTICAL	INPUT VOLTAGE	DRIVER	DIMMING	CONNECTOR TYPE
HEREDERA	V - Vertex	600 900 1200 1500	CM - Clear Matte Anodized	60W	AP1 - All Purpose APHE1 - All Purpose High Efficiency BR1 - Blue and Red CUST - Custom ¹	60 - 60°x120°	120VAC 230VAC 240VAC 277VAC 347VAC	MD - Mounted Driver RD - Remote Driver TW - Through Wire	D010 - 0-10V Dimming ² ND - Non-Dimming	BL - Bare Leads N515P - NEMA 5-15P ³ C3 - 3 Pin Connector

- For custom configurations contact factory
- Supplied standard with through-wire option
- Available only for 120VAC input voltage

Example: HEDERA-V-1200-CM-60W-AP1-60-120VAC-TW-D010-N515P



A Division of GVA Lighting, Inc.

Linnaeus Lighting
2771 Bristol Circle
Oakville, Ontario L6H 6X5
Canada

Phone: 289 814 2948
Email: info@linnaeuslighting.com
Web: linnaeuslighting.com