

Hedera Helix™

Specifications



PPF
162 umol/s per 300mm

Input Power
60W per 300mm

Efficacy
Up to 2.7 umol/J at max power

Input voltage
120-277VAC, 347VAC

Dimming
0-10V dimming option available

Light distribution
120° FWHM

Lifetime
L90 > 54,000 hours

Power factor
> 90%

Operating temperature
0°C to +40°C

Recommended Minimum Airflow
4 m/s



CRI
95


Features and Certifications

IP66
IP67
5 Year Warranty
Made in Canada
Unibody



Designed and built to meet cULus standards 1598, 8750, 8800

AP1 - All Purpose

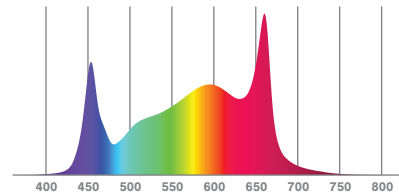

Configurations



FAMILY	MODEL	LENGTH (mm)	BODY COLOR	POWER (per 300mm)	LED TYPE	OPTICAL	INPUT VOLTAGE	DRIVER	DIMMING	CONNECTOR TYPE
HEDERA	H - Helix	600	CM - Clear Matte Anodized	60W	AP1 - All Purpose CUST - Custom ¹	120° - 120°x120°	120VAC	MD - Mounted Driver RD - Remote Driver	DPOT - Dimming with driver potentiometer D010 - 0-10V Dimming	BL - Bare Leads N515P - NEMA 5-15P ² N615P - NEMA 6-15P CEE77 - CEE 7/7 BS1363 - BS 1363 C3 - 3 Pin Connector
		900					230VAC			
		1200					240VAC			
		1500					277VAC 347VAC			

1. For custom configurations contact factory
 2. Available only for 120VAC input voltage

Example: HEDERA-H-1200-CM-60W-AP1-60-120VAC-MD-D010-N515P



A Division of GVA Lighting, Inc.

Linnaeus Lighting
 2771 Bristol Circle
 Oakville, Ontario L6H 6X5
 Canada

Phone: 289 814 2948
 Email: info@linnaeuslighting.com
 Web: linnaeuslighting.com