

# Hedera Vertex™

## Specifications



PPF

**144 umol/s per 300mm**

Input Power

**60W per 300mm**

Efficacy

**Up to 2.4 umol/J**

Input voltage

**120-277VAC, 347VAC**

Dimming

**0-10V dimming option available**

Light distribution

**60° FWHM**

Lifetime

**L90 > 54,000 hours**

Power factor

**> 90%**

Operating temperature

**0°C to +40°C**

Recommended Minimum Airflow

**4 m/s**

Features and Certifications

**IP66**


**IP67**

**5 Year Warranty**


**Made in Canada**




Designed and built to meet cULus standards 1598, 8750, 8800

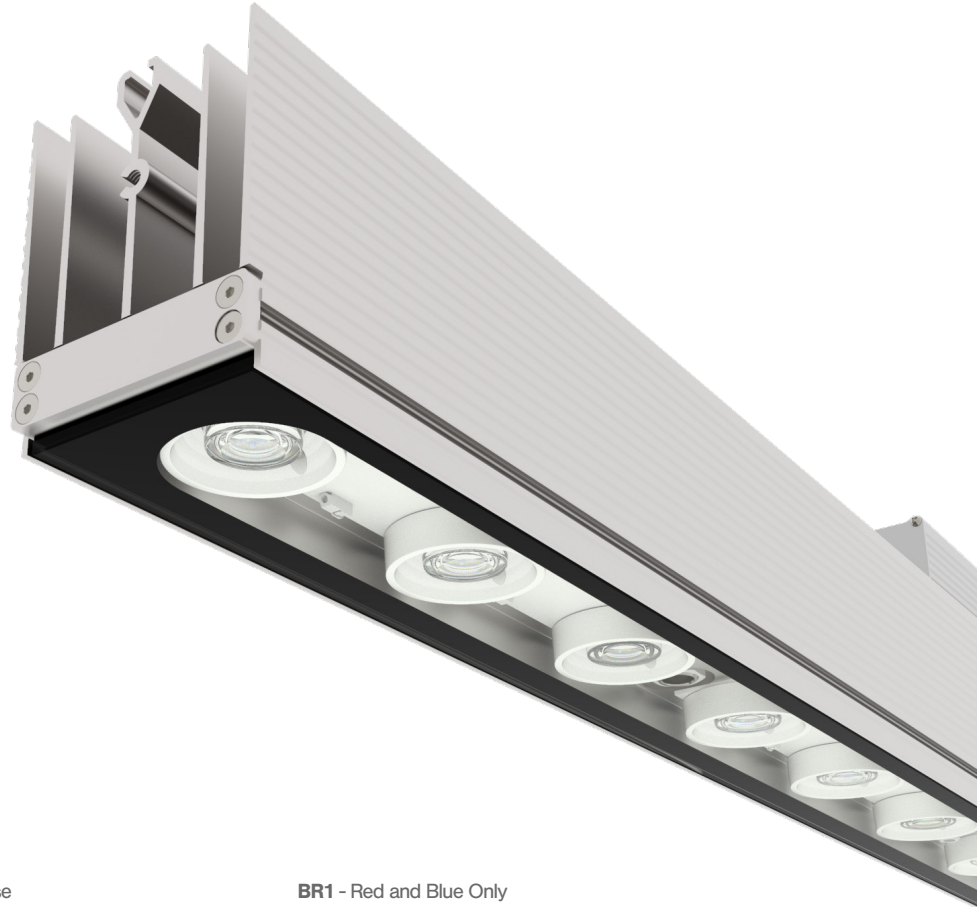

AP1 - All Purpose

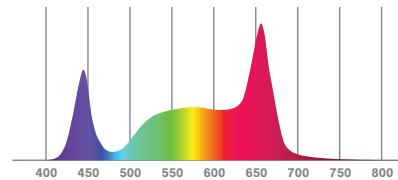

BR1 - Red and Blue Only

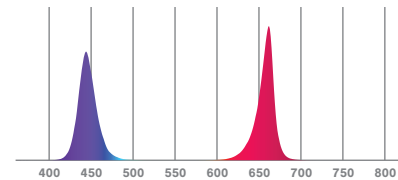

## Configurations



FAMILY	MODEL	LENGTH (mm)	BODY COLOR	POWER (per 300mm)	LED TYPE	OPTICAL	INPUT VOLTAGE	DRIVER	DIMMING	CONNECTOR TYPE
HEREDERA	V - Vertex	600 900 1200 1500	CM - Clear Matte Anodized	60W	AP1 - All Purpose BR1 - Blue and Red CUST - Custom <sup>1</sup>	60 - 60°x60°	120VAC 230VAC 240VAC 277VAC 347VAC	MD - Mounted Driver RD - Remote Driver	DPOT - Dimming with driver potentiometer D010 - 0-10V Dimming	BL - Bare Leads N515P - NEMA 5-15P <sup>2</sup> N615P - NEMA 6-15P CEE77 - CEE 7/7 BS1363 - BS 1363 C3 - 3 Pin Connector

- For custom configurations contact factory
- Available only for 120VAC input voltage

**Example:** HEDERA-V-1200-CM-60W-AP1-60-120VAC-MD-D010-N515P



A Division of GVA Lighting, Inc.

Linnaeus Lighting  
2771 Bristol Circle  
Oakville, Ontario L6H 6X5  
Canada

Phone: 289 814 2948  
Email: info@linnaeuslighting.com  
Web: linnaeuslighting.com